
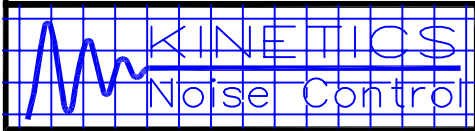


STATIC LOAD - (POUNDS/SQ. IN.)
STATIC LOAD - (KILOGRAMS/SQ. CM.)

To determine natural frequency for other thickness KIP pads.
 for 1/4" (6 mm) pads, multiply 1" (25 mm) natural frequency by 2.00
 for 1/2" (13mm) pads, multiply 1" (25 mm) natural frequency by 1.41
 for 1 1/2" (38 mm) pads, multiply 1" (25 mm) natural frequency by .82
 for 2" (51 mm) pads, multiply 1" (25 mm) natural frequency by .71
 for 3" (76 mm) pads, multiply 1" (25 mm) natural frequency by .58
 for 4" (102 mm) pads, multiply 1" (25 mm) natural frequency by .50

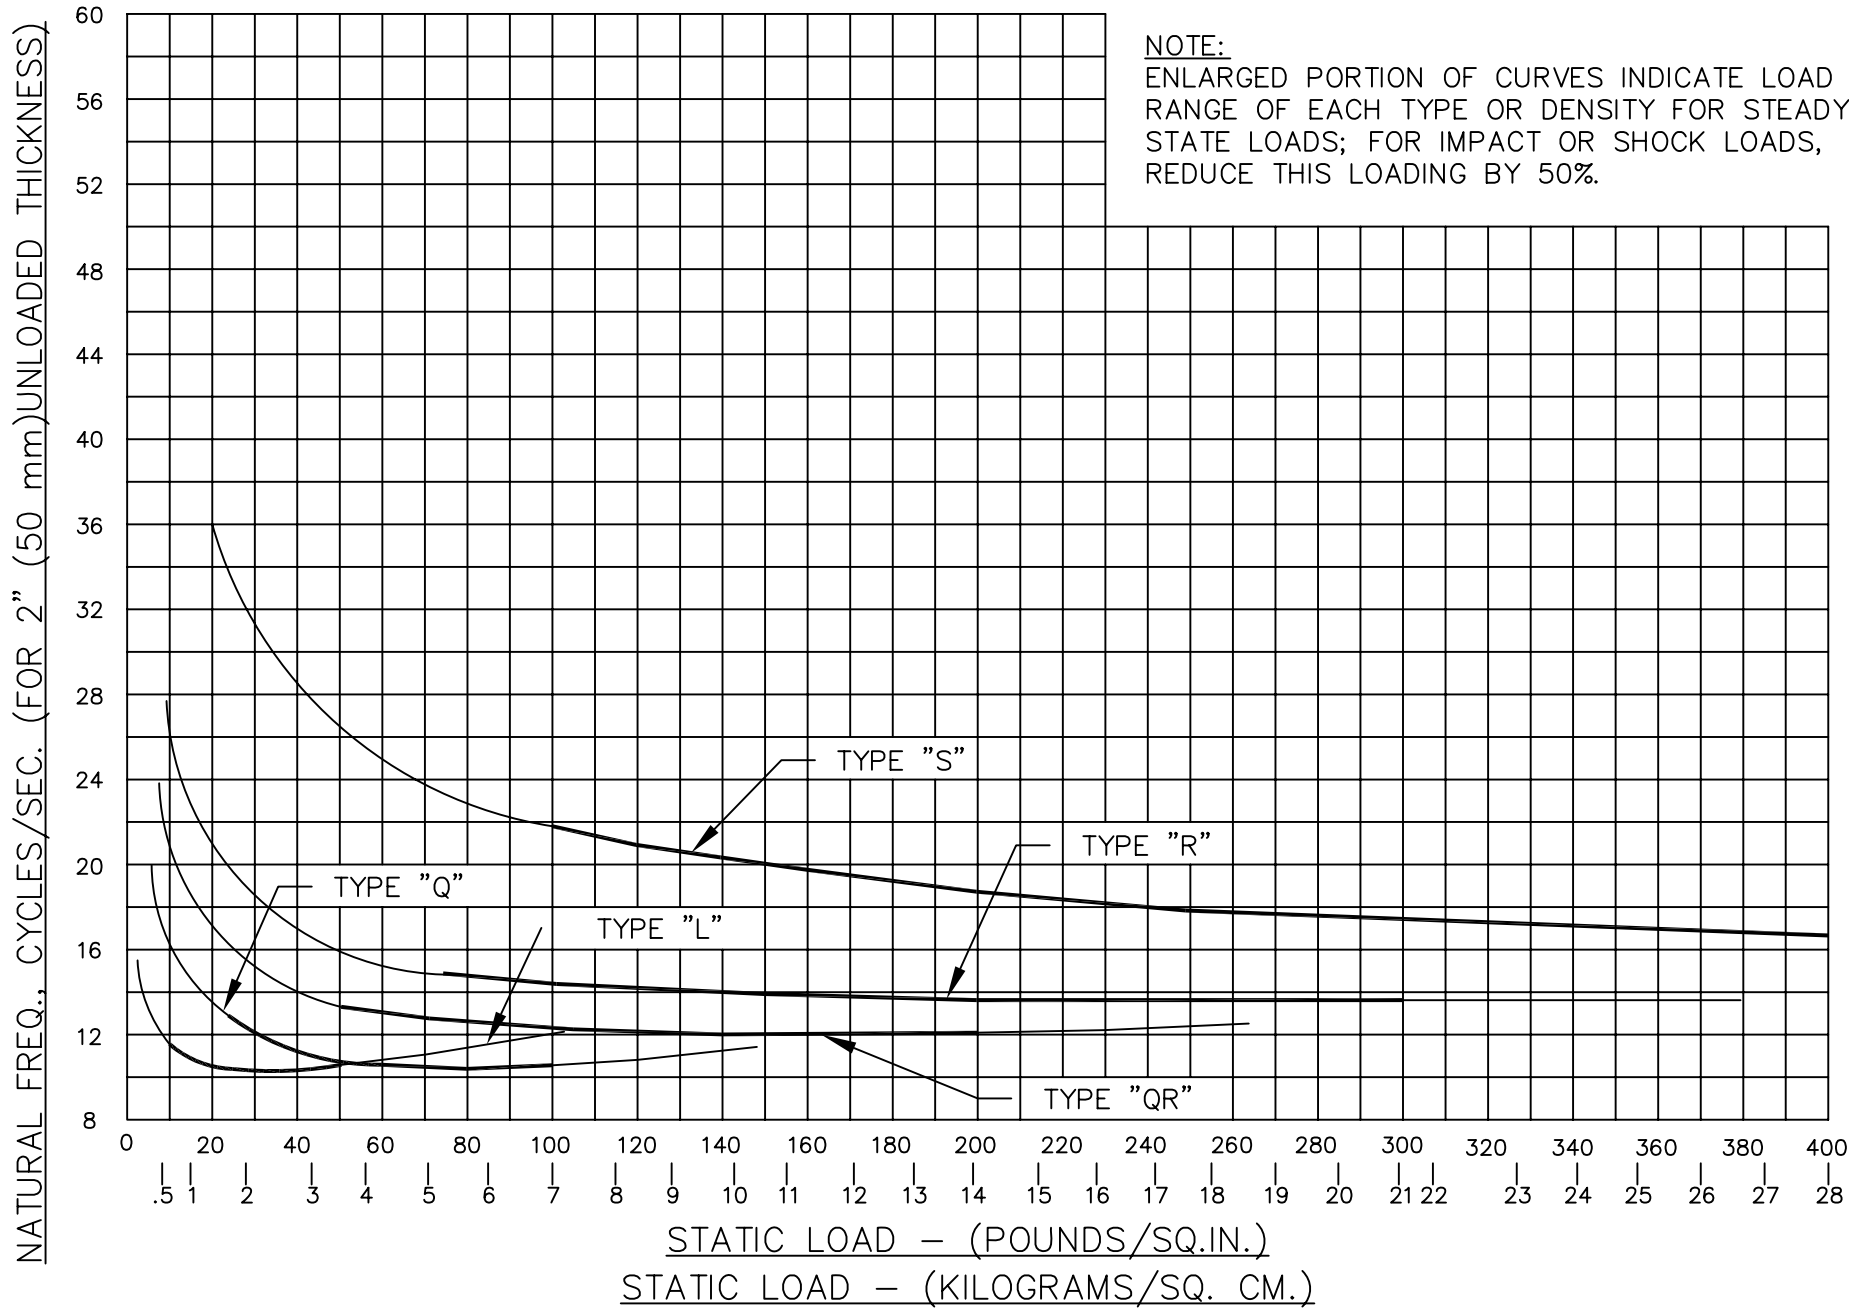

NATURAL FREQ. vs. STATIC LOAD CURVES
FOR KINETICS FIBERGLASS MATERIALS

LAST DATE
REVISED
05/11/01

DRAWING NO.
FF.215