



NOTE:
 ENLARGED PORTION OF CURVES INDICATE LOAD RANGE OF EACH TYPE OR DENSITY FOR STEADY STATE LOADS: FOR IMPACT OR SHOCK LOADS, REDUCES THIS LOADING BY 50%.

INITIAL STATIC DEFLECTION - (% OF UNLOADED THICKNESS)

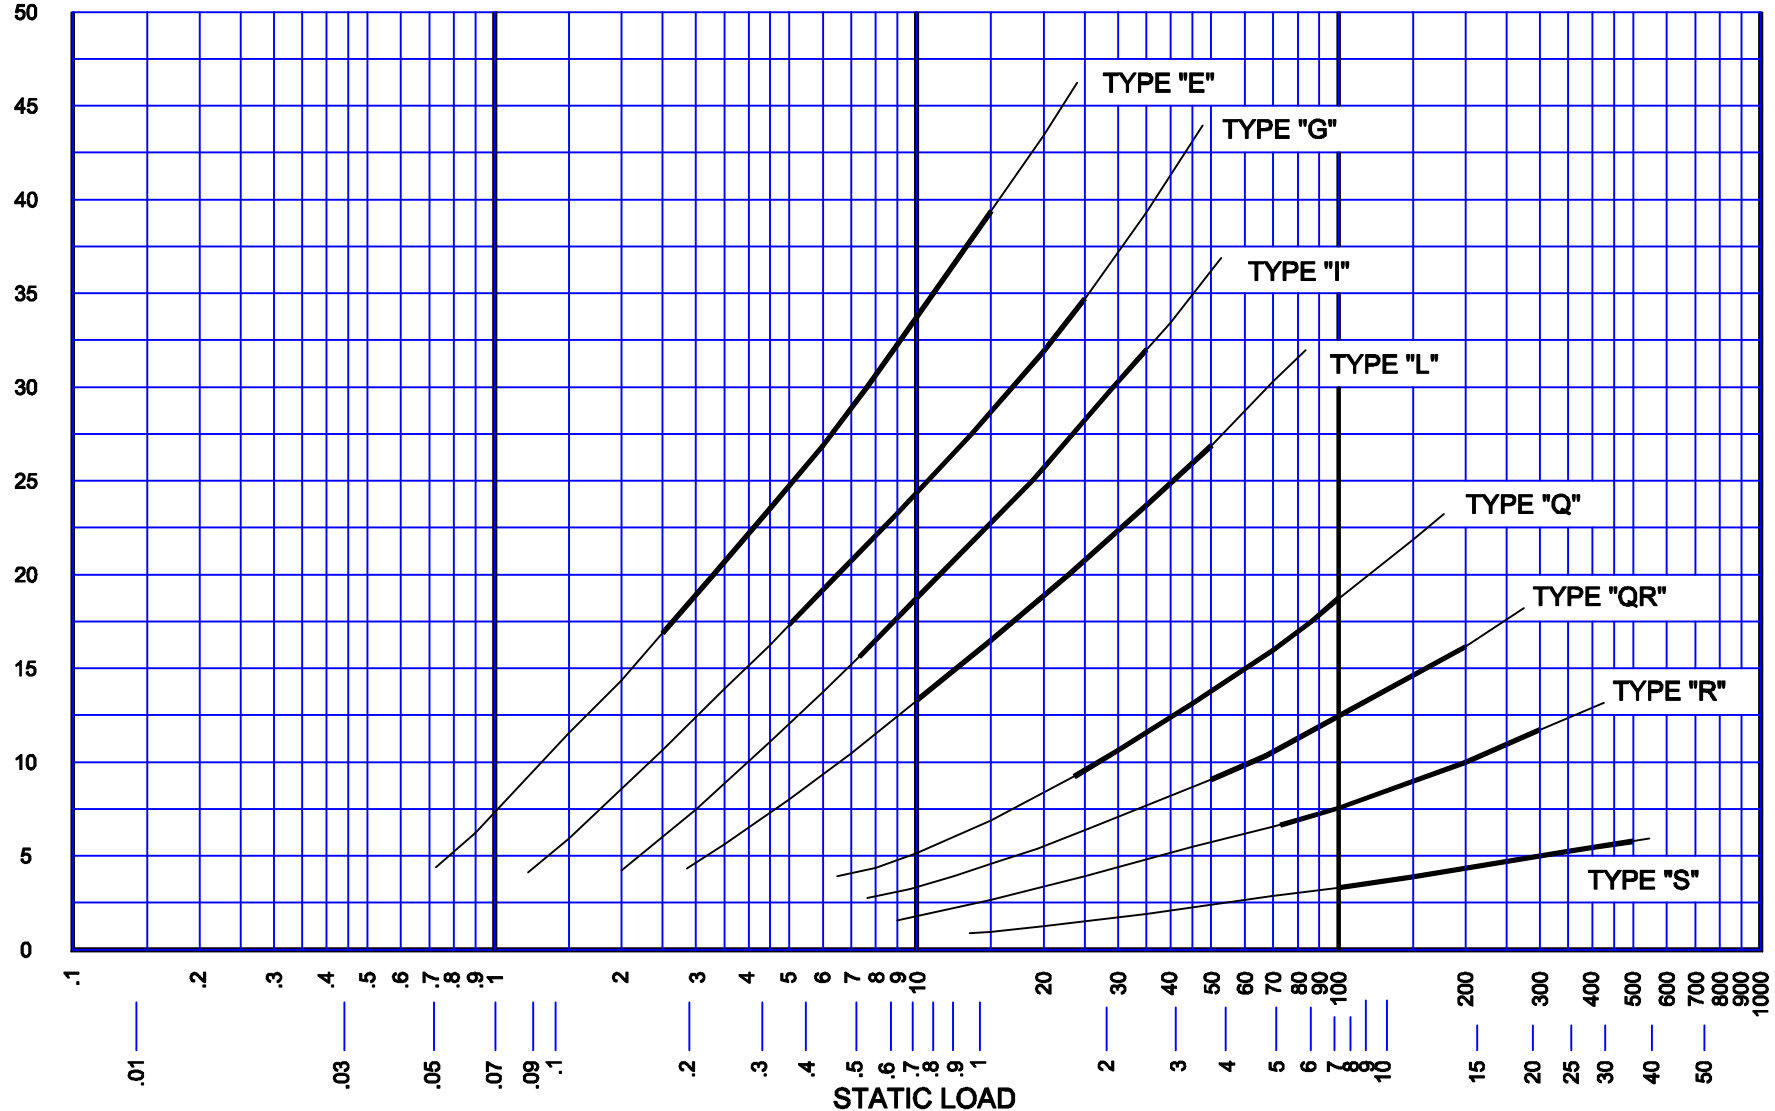

LBS/SQ. IN.

KG/SQ. CM.

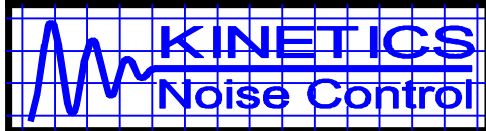

**STATIC LOAD-DEFLECTION CURVES
 FOR KINETICS FIBERGLASS MATERIALS**

LAST DATE
 REVISED
 11/04/05

DRAWING NO.
 FF.210