



ALL PADS ARE GREEN.

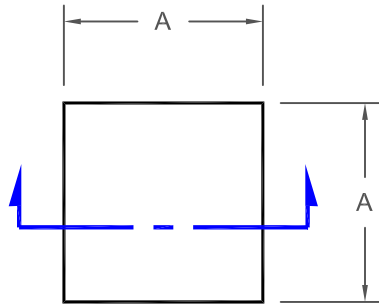

PLAN VIEW




SECTION

NOTES

1. KIP PADS ARE AVAILABLE IN SIZES OTHER THAN THOSE SHOWN.
2. KIP PADS ARE AVAILABLE WITH STEEL LOAD PLATES.
3. FOR PAD STATIC LOAD DEFLECTION AND NATURAL FREQUENCY vs. LOAD, SEE CATALOG PAGE KIP-4/96
4. CERTIFIED PRINTS ARE AVAILABLE FOR ALL MOUNTS.

MODEL	LOADING		STATIC DEFLECTION		NATURAL FREQUENCY (Hz)	DIMENSION			
	RANGE (lb)	RANGE (Kg)	RANGE (in)	RANGE (mm)		A		B (FREE HT.)	
						(in)	(mm)	(in)	(mm)
KIP-22-G	20 - 100	9 - 45	0.18 - 0.35	4 - 9	12.5	2.00	51	1.00	25
KIP-22-G2			0.35 - 0.70	9 - 18	8.9	2.00	51	2.00	51
KIP-22-I	30 - 150	14 - 68	0.16 - 0.32	4 - 8	14.0	2.00	51	1.00	25
KIP-22-I2			0.32 - 0.64	8 - 16	9.9	2.00	51	2.00	51
KIP-22-L	40 - 200	18 - 91	0.13 - 0.27	3 - 7	15.0	2.00	51	1.00	25
KIP-22-L2			0.26 - 0.54	7 - 14	10.5	2.00	51	2.00	51
KIP-33-L	90 - 450	41 - 204	0.13 - 0.27	3 - 7	15.0	3.00	76	1.00	25
KIP-33-L2			0.26 - 0.54	7 - 14	10.5	3.00	76	2.00	51
KIP-33-L3			0.39 - 0.81	10 - 21	8.7	3.00	76	3.00	76
KIP-44-L	160 - 800	73 - 363	0.13 - 0.27	3 - 7	15.0	4.00	102	1.00	25
KIP-44-L2			0.26 - 0.54	7 - 14	10.5	4.00	102	2.00	51
KIP-44-L3			0.39 - 0.81	10 - 21	8.7	4.00	102	3.00	76
KIP-44-L4			0.52 - 1.08	13 - 27	7.5	4.00	102	4.00	102
KIP-22-Q	100 - 400	45 - 181	0.09 - 0.18	2 - 5	15.5	2.00	51	1.00	25
KIP-22-Q2			0.18 - 0.36	5 - 9	10.6	2.00	51	2.00	51
KIP-33-Q	225 - 900	102 - 408	0.09 - 0.18	2 - 5	15.5	3.00	76	1.00	25
KIP-33-Q2			0.18 - 0.36	5 - 9	10.6	3.00	76	2.00	51
KIP-33-Q3			0.27 - 0.54	7 - 14	8.9	3.00	76	3.00	76
KIP-44-Q	400 - 1600	181 - 726	0.09 - 0.18	2 - 5	15.5	4.00	102	1.00	25
KIP-44-Q2			0.18 - 0.36	5 - 9	10.6	4.00	102	2.00	51
KIP-22-QR2	200 - 800	91 - 363	0.16 - 0.30	4 - 8	12.0	2.00	51	2.00	51
KIP-22-R	300 - 1200	136 - 544	0.07 - 0.12	2 - 3	19.5	2.00	51	1.00	25
KIP-22-R2			0.14 - 0.24	4 - 6	13.7	2.00	51	2.00	51
KIP-22-S	400 - 2000	181 - 907	0.04 - 0.06	1 - 2	23.3	2.00	51	1.00	25
KIP-22-S2			0.08 - 0.12	2 - 3	16.5	2.00	51	2.00	51



TITLE  
**KIP PAD DATA**

LAST DATE REVISED  
**06/05/01**

DRAWN BY  
**DA**

DRAWING NO. **S-21.00-1A** S-21